


SCip Key Ring Remote 2

STKR-2

Installation guide



For use with:



Universal Receiver




SCD™ series



SCD mini™ series

- Extended battery life
- Two way communication
- Small form factor




REPLACEMENT OF BATTERY

Replacing the battery:

When the Key ring remote 2 is paired with an SCD or SCD mini, you will be notified on the display of this when it is time to replace the battery. As for the Universal Receiver, this will alert you by beeping much like a smoke detector does.


When it is time to replace the battery, gently pry the enclosure open, i.e. with a small screwdriver and replace with a new CR2032 size Lithium coin cell battery.

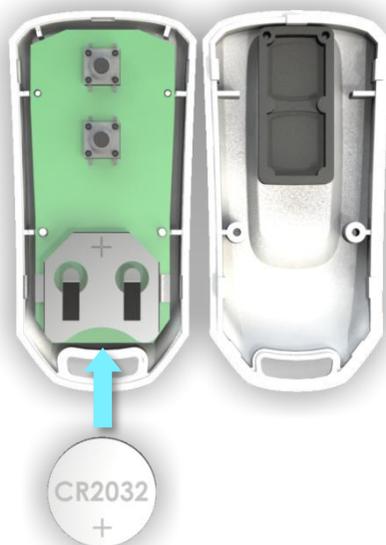


Please make sure that the rubber pad part for the two buttons is properly in place when you squeeze the enclosure back together, an easy approach to ensure this is to keep the top part of the enclosure bottoms up during this process.

ADD TO A UNIVERSAL RECEIVER

Repeat the steps below to add the Key Ring Remote 2 to a Universal Receiver:

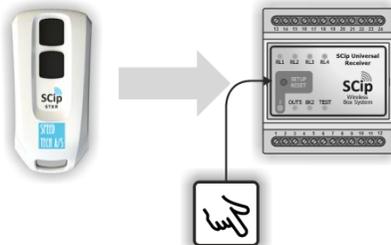


1. Activate programming mode



Press setup/reset once

2. Select output



Press setup/reset multiple times to select the desired output

3. Add



Activate the device to add to the selected output

4. Deactivate programming mode



Press setup/reset multiple times to select the ! LED (Or wait approx. 30 seconds)

For pairing with a SCD/SCD mini

- See next page →


For further information please refer to the Universal Receiver manual.

Icon description:

	Single press
	Press and hold for more than 1 second
	Press and hold for more than 10 seconds
	Press to step one or more
	Internal beeper audible feedback
	Lamp flashing
	Lamp lit
	Activate SCip client

ADD TO A SCD OR SCD MINI

Repeat the steps below to add the Key Ring 2 to a SCD or SCD mini:

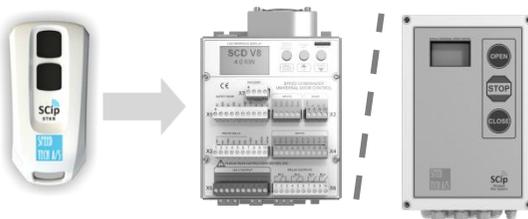

MENU ENTER x 1 → System Status
 DOWN x 4 → Wireless Setup
 MENU ENTER x 1 → Enter Code 0
 Only if menu is locked
 Menu Locked

UP x 1 → Enter Code 135
 Only if menu is locked
 Menu Locked
PRESS & HOLD
 MENU ENTER x 1 → Wireless Setup
 Add Device
 Device Setup
 Reset All
 MENU ENTER x 1 → Add Device
 Waiting For Device

Activate the Key ring remote 2 for at least 10 seconds



PAIRED
Key ring remote 2
Serial: xxxxxx

For further information about functionality etc. please refer to the SCD / SCD Mini installation guide.

Technical data:

Wireless range (indoor):	15m
Network type/frequency:	2.4GHz ISM band
Temperature range:	-20 to +40°C
Power supply:	Battery, Lithium 3V (CR2032)
Ingress Protection Class:	21
Dimensions:	69,85 x 34,80 x 17,53mm (L x B x H)
Weight:	25g